

TECHNICAL DATA SHEET

LED Down Light / EN-DLI030-02, EN-DLI045-02

VERSION - 04.08.2017

STANDARD LUMINAIRE

Reference	EN-DLI030-02	EN-DLI045-02
Dimensions	293 x 158 x Ht.94mm	428 x 158 x Ht.94mm
Cut-Out	250 x 130mm	380 x 130mm
Power	30W	45W
Current	350mA per spot	350mA per spot

Protection Class	IP20
Voltage	AC220-240V
Led Type	Cree Cob Led
CRI	80+ or 90+
Beam Angle	24° or 38° or 60°
Dimmable	Yes
Orientable	25° pivot axis & 350° horizontally
Working T°	-20°C ~ +45°C
Warranty	5 years

FINISH

Standard	White, Black or Silver
----------	------------------------

ON REQUEST

Beam Angle	24° or 38° or 60°
Dimming Option	Triac, Dali, 1-10V <i>Ask technical departement for more information</i>

COLOR TEMPERATURE & LUMINOUS FLUX

EN-DLI030-01

2'700K	3'000K	4'000K	5'000K
2x1185 lm ±5%	2x1275 lm ±5%	2x1368 lm ±5%	2x1396 lm ±5%

EN-DLI045-01

2'700K	3'000K	4'000K	5'000K
3x1185 lm ±5%	3x1275 lm ±5%	3x1368 lm ±5%	3x1396 lm ±5%


CERTIFICAT

CE RoHS

APPLICATION: Showcase, Art, Sculpture, Museums, Shelves and commercial lighting,



EN-DLI030-02

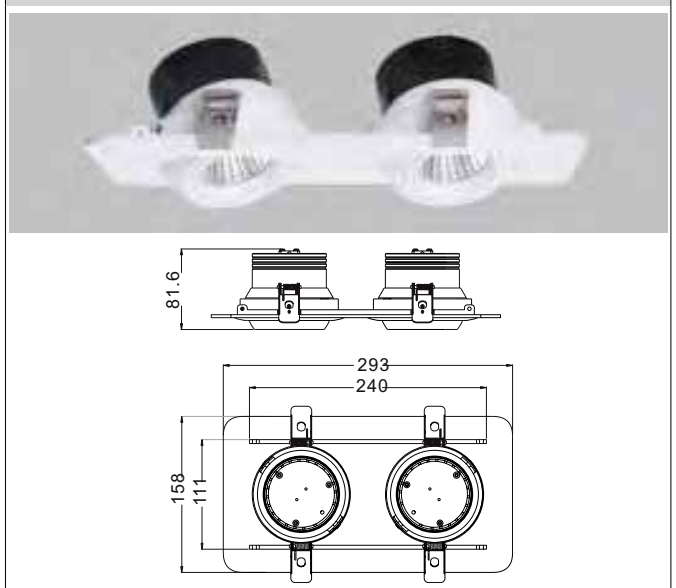

EN-DLI045-02

