

TECHNICAL DATA SHEET

LESITAL IP65 / Aga-Led® Type B

VERSION - 16.12.2016

STANDARD LUMINAIRE

Reference	LESITAL
Protection Class	IP65 - Tube IP68 (1 meter)
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	78 x 89mm
Lenght Standard	200 - 530 - 1025 - 1520 - 2015mm
Lenght on measure	on request up to 2015mm
Nb Lighting Source	16 LED/m
Voltage	24V
Power	With B3: 15.36W/m - With B6: 19.2 W/m
Connecting Cable	One side: 1m 180° cable Silicone 2x1.5mm ²



FINISH


Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-enameling Powder Coating RAL Color Anodising

Glass Finishing

Standard	Clear
On request	Opaline


LESITAL / AGA-LED® TYPE B - Rigid Loop

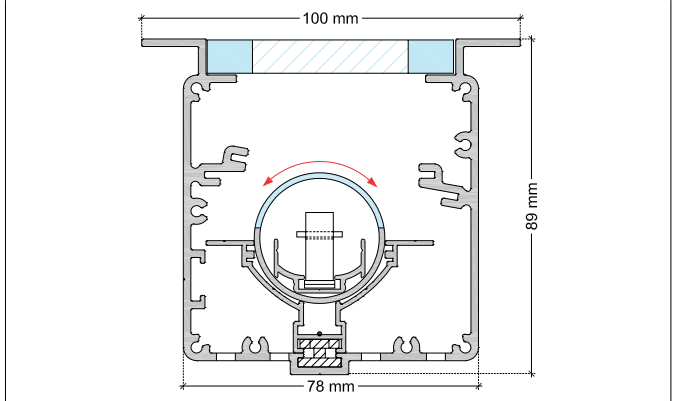

ON REQUEST

Recessed Box	LESI BOX (See data sheet)
Grid	GTCE : Transversal
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

ON REQUEST : Transversal Grid GTCE

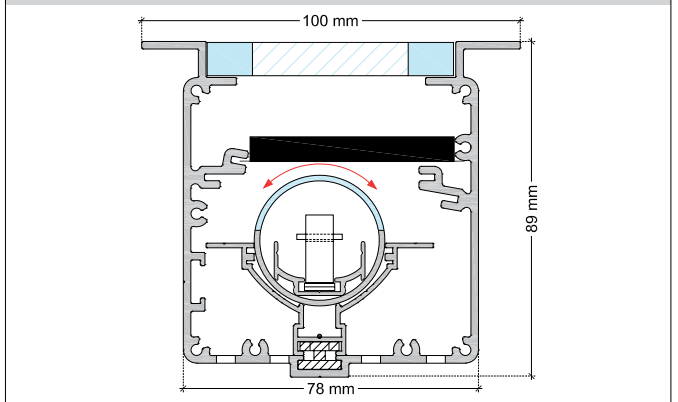

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

CERTIFICAT



AGABEKOV



AGABEKOV SA *Manufacture* 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@agabekov.com



AGABEKOV SA *Bureau d'etudes* 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.agabekov.com

