

TECHNICAL DATA SHEET


TMTAL IP20 / Flex Led

VERSION - 30.04.2018

STANDARD LUMINAIRE

Reference	TMTAL
Protection Class	IP20
Lighting Source	Flex Led
Dimensions	340 x 180mm
Standard Length	670 - 1000mm
Length on measure	up to 3035mm
Nb Lighting Source	60 LED/m
Voltage	24V
Power	4.8W/m
Connecting Cable	Both tige : 1m standard cable 2x1.5mm ²
Fixation	2 x(TIGE-8mm + BFTV-8mm)/m + Plexiglass
Cover	VFC (Clear Glass)
End Caps	EPR190

APPLICATION: PICTURE LIGHTING

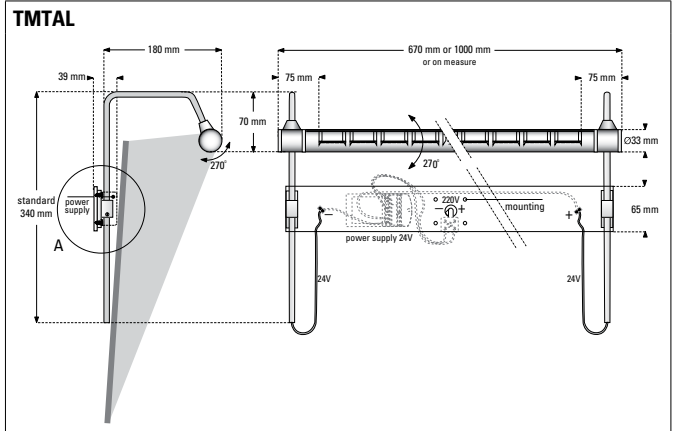

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect

ON REQUEST

Fixation	BFTH-8mm ALTR - Power Supply included
Medium Support	FCT (distance > 1500mm)
Cover	VFO (Opaline Glass)
Front Visor	VAE (Not possible with Cover)
Dimming Option	1-10V, Dali, KNX Ask technical department for more information


LIGHTING SOURCE

Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C


Color Temperature & Luminous Flux / Meter

CCT	2700K	3000K	4000K
lm/m	390 lm	390 lm	425 lm

FIXATION - (Detail A)

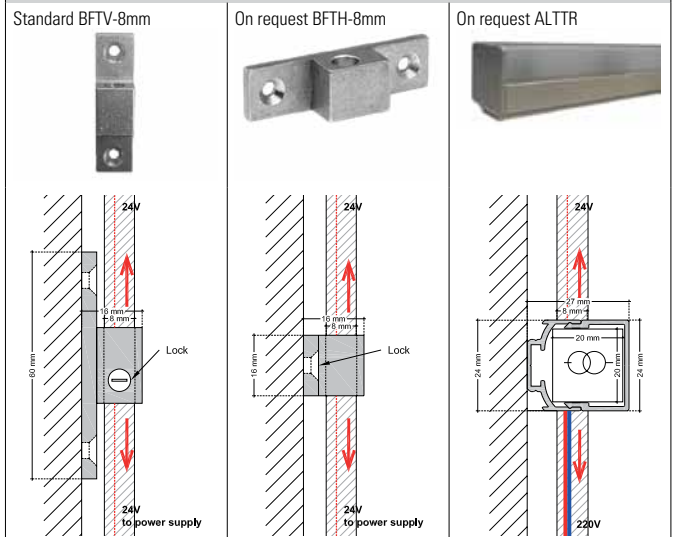

HOW TO ORDER

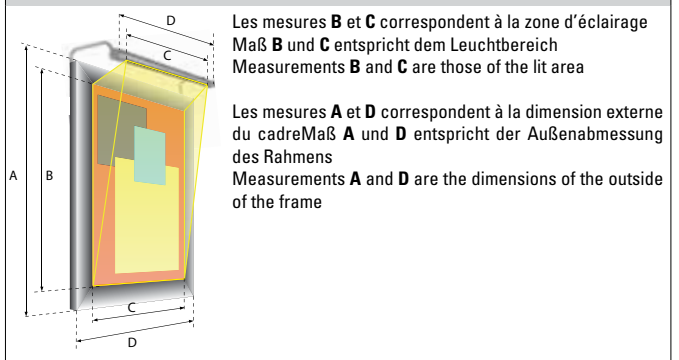

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E-mail: info@aaabekov.com



AGABEKOV SA Bureau d'études 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

