

TECHNICAL DATA SHEET

SL-EXT-03 / Aga-Led® 01LP12

VERSION - 09.12.2015


STANDARD LUMINAIRE

Reference	SL-EXT-03
Protection Class	IP65
Lighting Source	Aga-Led® 01LP12
Size - mm	L.80 x Ht.200mm
Nb Lighting Source	1 LED
Voltage	12V Dimmable / 24V Non Dimmable
Power	3.5W
Connecting Cable	20cm standard cable 2x1mm²
Power Supply	Not Included
Spot Cover	Clear Glass + Honeycomb Grid
Fixation	Garden Support SJ

APPLICATION: GARDEN



Glass LP-30 + Honeycomb Grid ø30mm



On request: Adjustable flaps VOA27



FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	<i>Thermo-enameling</i> <i>Power Coating RAL</i> <i>Color Anodising</i> <i>Chromium or Gold plating</i>

ON REQUEST

Connecting Plug	AF-E / AMS-E
Spot Cover	Opaline Glass
Adjustable flaps	VOA27
Dimmable	YES (1-10V, Dali, DMX, KNX) <i>Ask technical department for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® 01LP12
Voltage	12V (dimnable) / 24V (non dimnable)
Power	3.5W
Beam Angle	16°
CRI	80
Kelvin	Light Output
2200K	~115lm/Unit
4000K	~183lm/Unit

Lifetime at 25° 50'000h


Working T° -20°C ~ +40°C

Moisture resistant due to conformal silicone coated

CERTIFICAT



SL-EXT-03 / Aga-Led 01LP12

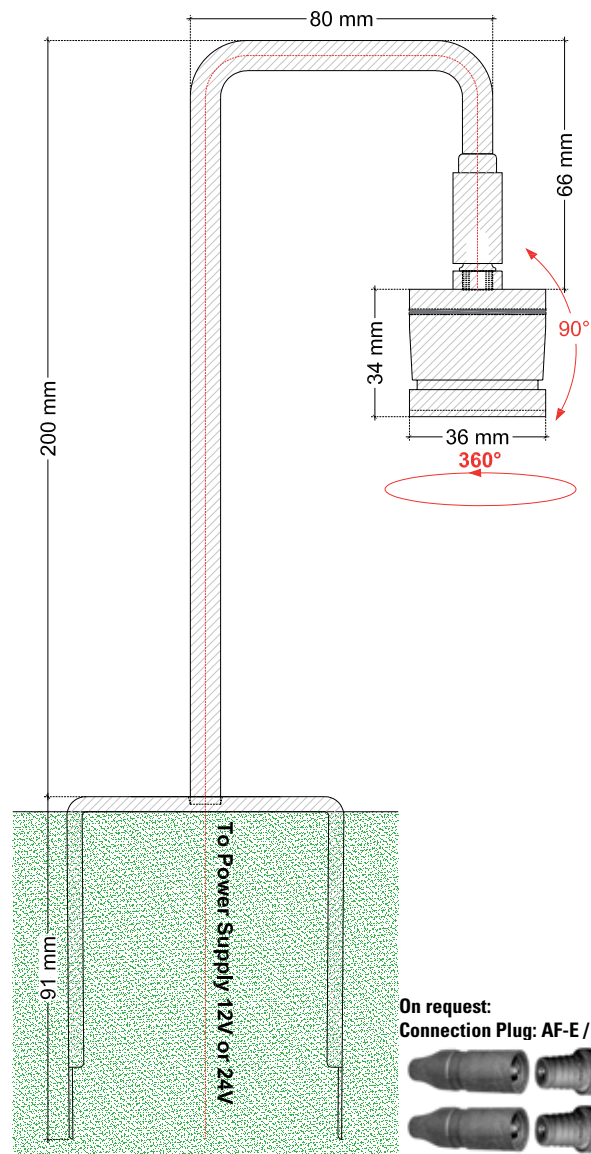

On request:
Connection Plug: AF-E / AMS-E

